


>VERSION 6<

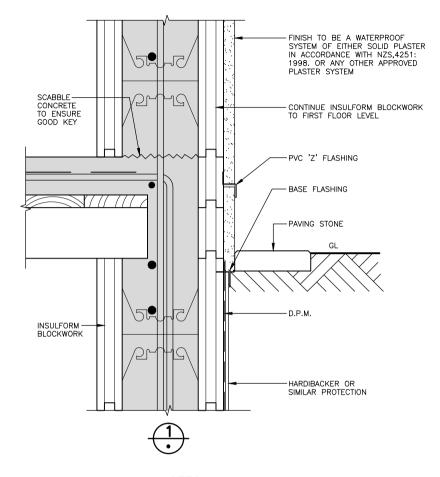

NOTES:

- 1. THE DESIGN OF ALL RETAINING WALLS SHALL BE PROVIDED BY A REGISTERED ENGINEER.
- 2. ALL MATERIAL SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
- 3. THE BACKFILL SHALL SLOPE AWAY FROM THE WALL

E	14/4/09	METAL BRIDGE CHANGED TO THERMOPLASTIC BRDIGE	W.L	CGF			
D	28-1-00	CANGES AS PER BRANZ RECOMMENDATIONS	W.L	WWR			
С	29/9/98	DPM, PVC FLASHING,	W.L	WWR			
	DATE	DESCRIPTION	ENG	DRN	EN.CK	DN.CK	APP.

© 2009 FILE:[PG57_7_revE] 14-APRIL-2009

INSULFORM NZ

CONTINUOUS REINFORCED CONCRETE
WALL SYSTEMS. PAT.NO.247577

HOROTOM SAN 3804

FOR 1809 SA

STRUCTURAL ENGINEERS

YYLEWIS & BARROW LTD
PH 366 4320 CHRISTCHURCH

TYPICAL DETAILS OF BASEMENT WALL CONSTRUCTION WITH CONCRETE FLOOR ABOVE

ENG	W.L.	FILE	DRAWING		
DRN	B.T	6157	7	Ð	
снк	W.L.	0137)	
DATE	5/94				